


Mat-to-Gateway Connector

Mat 2.0 Accessory · Counting Systems

MAT2GATEWAY

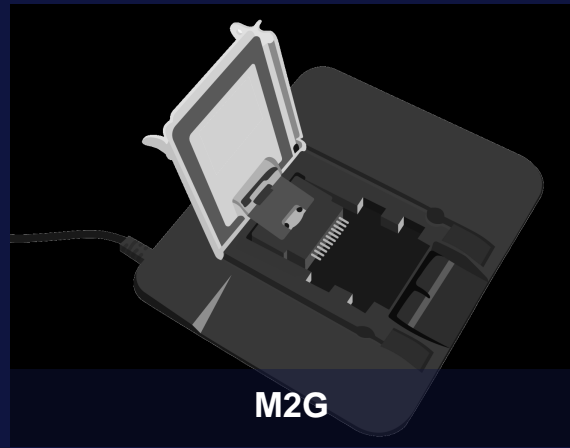

The essential link between mats and gateway — IP54-certified mechanical locking.

KEY FEATURES

L **Secure Locking**
Mechanical and electrical locking system ensuring a stable, reliable connection.

C **IP54 Certified**
Protection against dust and water spray. Suitable for demanding environments.

I **Quick Install**
Open, insert, press 'Press', close and lock. No tools required.

E **Extension Ready**
Accepts extension cable for a maximum total distance of 8 m mat-to-gateway.

TECHNICAL SPECIFICATIONS

Length	176 mm / 6.93 in
Width	152 mm / 5.98 in
Thickness	12 mm / 0.47 in
Integrated cable length	3 m / 9.8 ft
Weight	77 g / 0.25 oz
Housing materials	SUS304, SGCC, POM, ADC12
Operating humidity	35-65% RH
Operating temp.	0-50°C / 32-122°F
Storage temp.	10-25°C / 50-77°F
Certifications	CE Standard · IP54

INSTALLATION & USE

- 1 Open the cover**
Lift the Mat-to-Gateway connector cover to access the female connector.
- 2 Connect the mat**
Insert the mat's male connector into the female connector. Press 'Press' to confirm.
- 3 Close and lock**
Close the cover and lock it. Verify that the connection is securely fastened.
- 4 Connect to Gateway**
Connect the other end of the cable to the 'Mat Connector' port on the gateway.